


NVLINK SLI-BRIDGE SETUP

To enable an NVLINK SLI-BRIDGE connection with the AMP Extreme Holo:

1. On the top positioned GPU, remove the left most piece just below the NVLINK SLI connection. No tools are required, carefully **SLIDE OUT** and remove.
2. Insert the NVLINK SLI-Bridge and connect the two NVLINK compatible graphics cards.

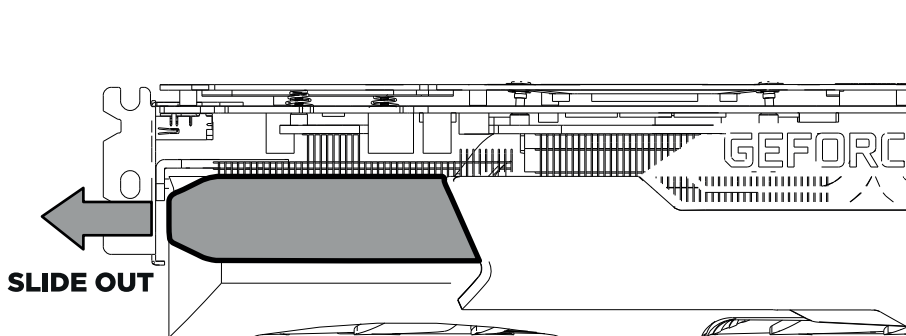

**Make sure to turn off the computer and unplug the power cord before installing or removing the SLI Bridge.*